

FORTIS  
FORTIS FITT  
CONDUCTO

# HOMOGENEOUS

COMMERCIAL FLOOR COVERINGS

GRABO  
COMMERCIAL



# FORTIS

HIGH PERFORMANCE,  
NON-DIRECTIONAL  
HOMOGENEOUS  
FLOOR COVERING




## PERFORMANCE, FEATURES & BENEFITS

Excellent abrasion resistance, Unique non-directional design, Low residual indentation  
Easy cleaning and maintenance thanks to iGuard PUR Surface, Anti-bacterial, Antistatic

## RECOMMENDED USAGE

Healthcare | Education | Offices  
Other public areas

## CONSTRUCTION

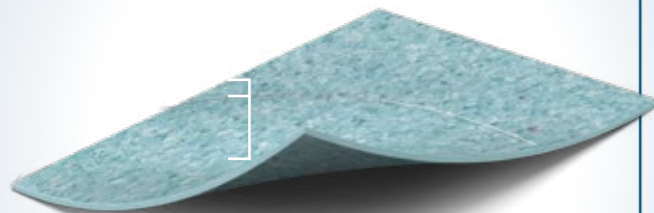

### DESCRIPTION

Construction		homogeneous
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,8 kg/m <sup>2</sup>

### CLASSIFICATION

European classification	EN 685	class: 34/43
-------------------------	--------	--------------

### PERFORMANCE


Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0.4 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	DIN 51130	R9
	EN 13893	class: DS
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Hygiene		bacterial resistant
Seaming method		hot or cold welding
Warranty		10 year




iGuard PUR Surface  
Non-directional  
homogeneous layer




# FORTIS

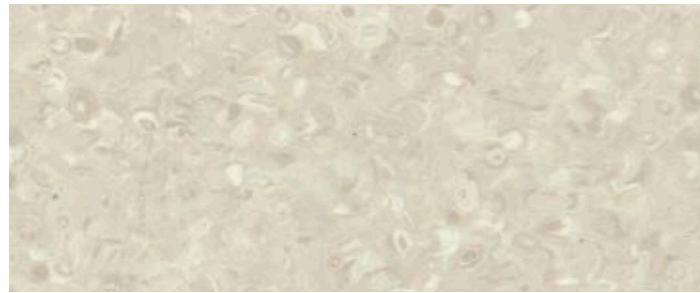

SILVER

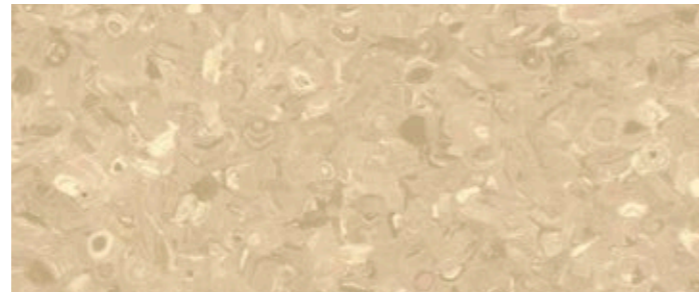

TOBACCO

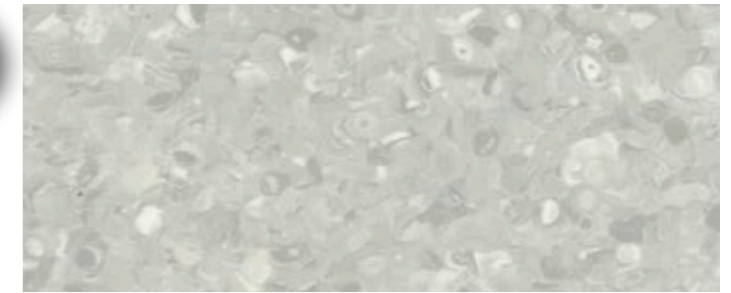

BONE




SAND




CANARI



STEEL

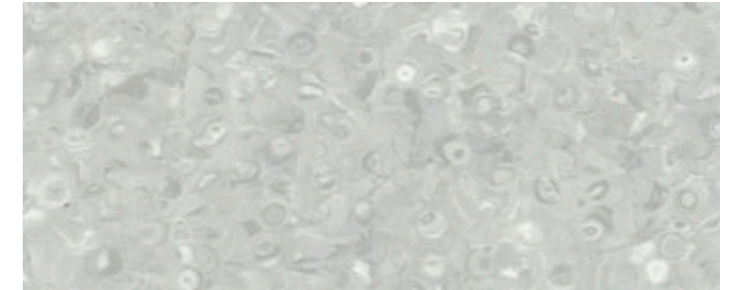


FOG

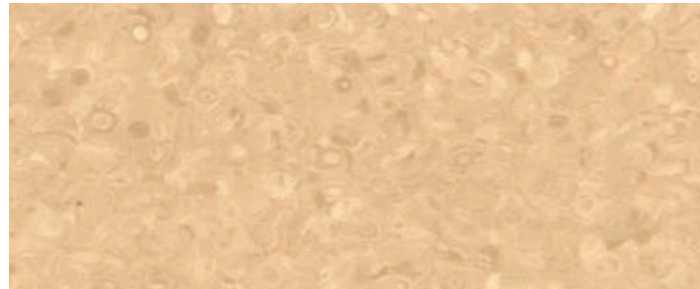


CAMEL




GOLD

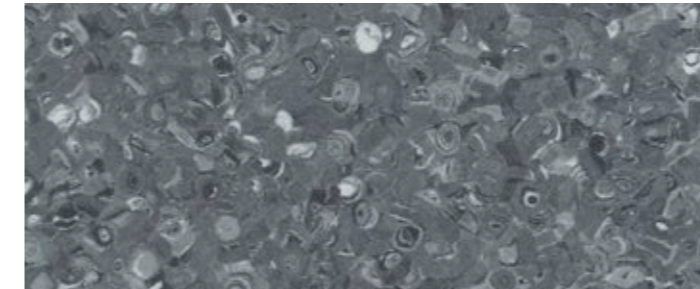


ANTHRACITE

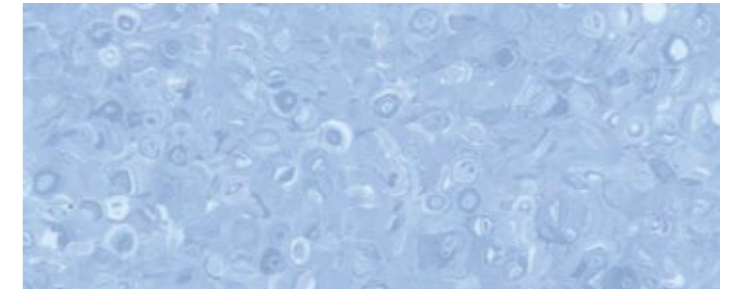


AQUA

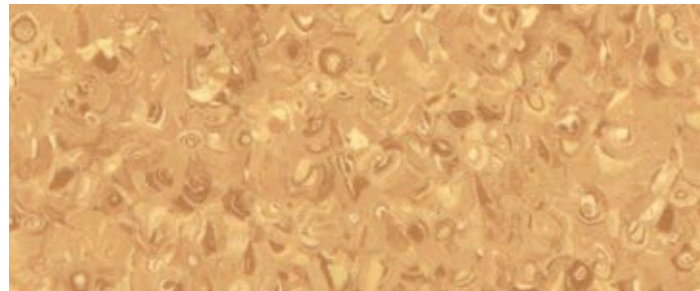


KORK

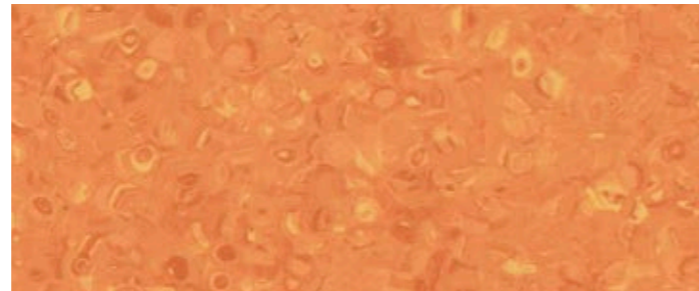


ORANGE

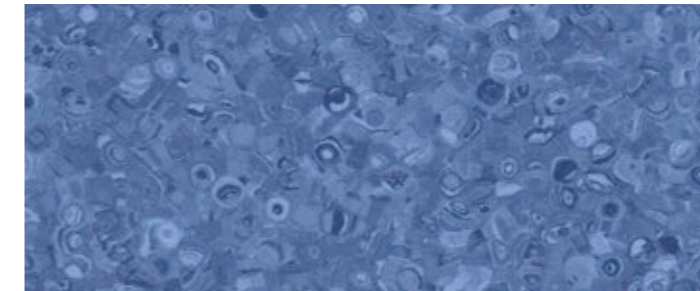


INDIGO

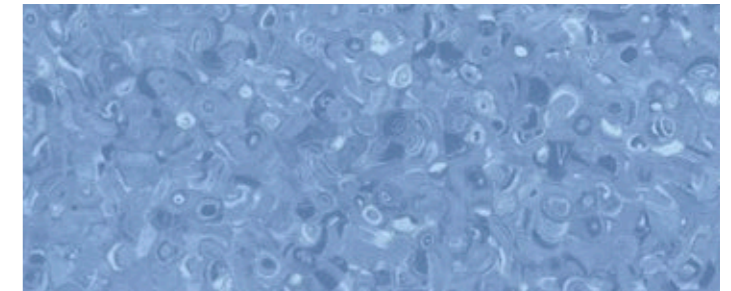


COBALT

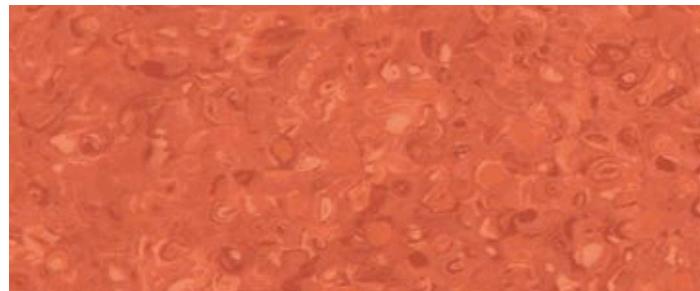

CORAL

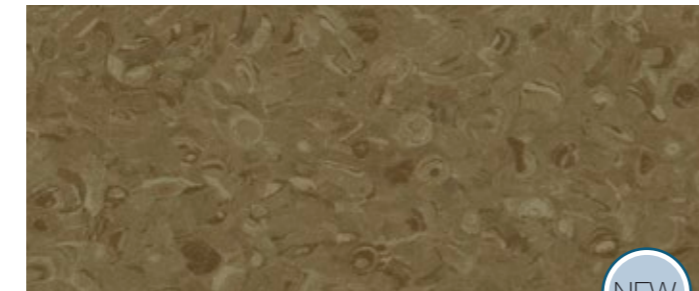

MOCCA

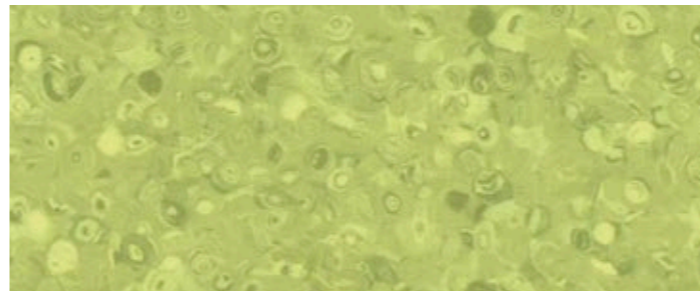

KIWI



CACTUS



# FORTIS FITT

FORTIS FITT IS A  
HEAVY DUTY DANCE  
AND FITNESS FLOOR  
FOR HIGH  
PERFORMANCE




## PERFORMANCE, FEATURES & BENEFITS

Long life expectancy, iGuard surface – easy cleaning and maintenance, Excellent abrasion and scuff resistance, Non-directional design in vogue colors, Anti-bacterial, Dimensionally stable

## RECOMMENDED USAGE

Fitness halls | Stages | Exhibitions | Catwalks  
Dance halls | Studios

## CONSTRUCTION

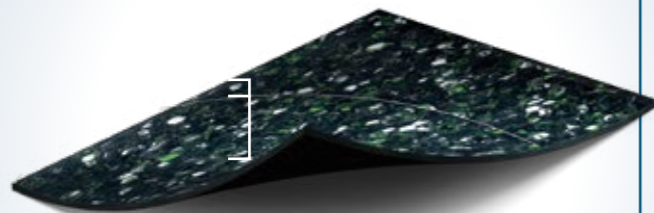

iGuard PUR Surface  
Non-directional  
homogeneous layer

### DESCRIPTION

Construction		homogeneous
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,8 kg/m <sup>2</sup>

### CLASSIFICATION

European classification	EN 685	class: 34/43
-------------------------	--------	--------------

### PERFORMANCE


Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0.4 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	DIN 51130	R9
	EN 13893	class: DS
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Hygiene		bacterial resistant
Seaming method		hot or cold welding
Warranty		10 year




JADE



AMBER

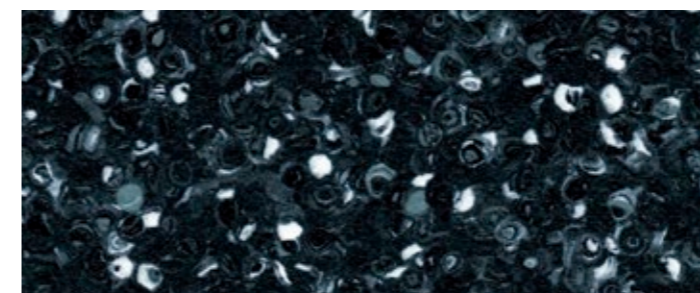


ONYX

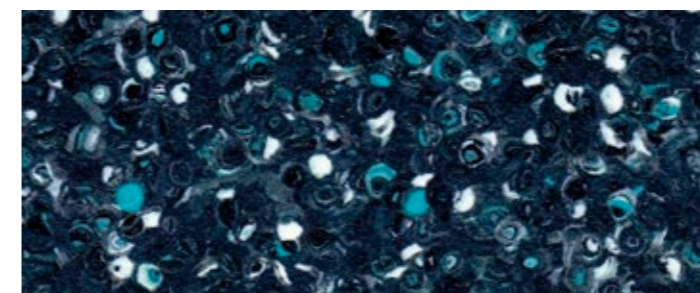


TURQUOISE



ROSA

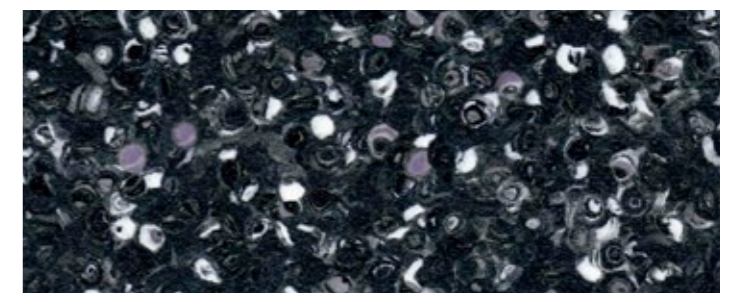

AMETHYST

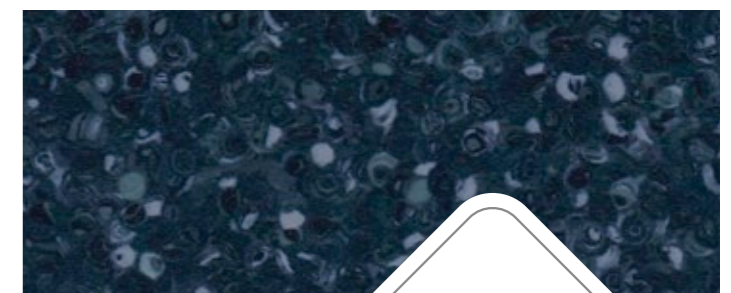

NOX

FORTIS FITT